

Spyder 2 S2-1x-xxx40

Line Scan Cameras



Key Features

- Resolutions from 512 to 2k
- High responsivity
- Base Camera Link™
- 8 or 10 bit selectable output
- Single 12 V to 15 V power supply
- Compact design

Programmability

- Programmable pixel to pixel correction
- Adjustable analog and digital gain and offset
- 8 or 10 bit selectable output
- Adjustable integration time and line rate
- Test pattern, line statistics, and camera diagnostics

Typical Applications

- Web inspection (multi-cam and narrow web)
- Pick and place
- Document scanning
- Flat panel display inspection

Overview

The Spyder 2 is powerful yet very cost effective.

The Spyder 2 is a small, fast, and cost effective camera boasting a full feature set and a Camera Link™ interface. The Spyder 2 surpasses its predecessor in responsivity and programmability, requires less lighting, and offers precise control over key performance variables such as gain and offset. With a single tap operating at 40 MHz, the Spyder 2 provides the throughput your application requires with no compromise to image quality. For those OEMs migrating from the original Spyder, the Spyder 2 does not require a new optics design because pixel size and fill factor remain unchanged from the original Spyder at 14 μm and 100% respectively.

In addition to its high performance and affordability, the Spyder 2 also incorporates advanced features such as flat field correction and CDS (Correlated Double Sampling). All resolutions provide appropriate, readily available standard lens options (C mount and F mount).


Specifications

Resolution	512 / 1024 / 2048
Data Rate	40 MHz
Max. Line/Frame Rate	65 / 35 / 18 kHz
Pixel Size	14 μm
Data Format	8, 10 bit
Output	Base Camera Link
Lens Mount	M42 x 1, C, F mount
Responsivity	136 DN/(nJ/cm ²) @ 10 dB
Dynamic Range	54 dB
Nominal Gain Range	± 10 dB
Size	50 mm x 85 mm x 53.7 mm
Mass	<450 g
Operating Temp	10 °C to 50 °C
Power Supply	12 V to 15 V
Power Dissipation	<5 W
Regulatory Compliance	CE
Control	MDR26 Camera Link
Data	Shared with Control
Power	Hirose HR10 6 pin
Example Part Number	S2-11-01K40








Spyder 2 S2-1x-xxx40

Line Scan Cameras

The Spyder 2 is powerful and versatile yet very cost effective. Its Camera Link interface means cheaper cabling.

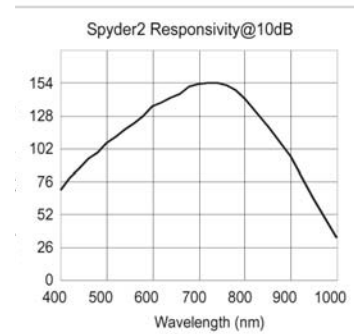

C-MOUNT



F-MOUNT

All units in mm.



CALIBRATION STICKER

www.dalsa.com

Americas

Boston, USA
Tel: +1 978-670-2000
sales.americas@dalsa.com

Europe

Munich, Germany
Tel: +49 8142-46770
sales.europe@dalsa.com

Asia Pacific

Tokyo, Japan
+81 3-5960-6353
sales.asia@dalsa.com

DALSA is an international leader in digital imaging and semiconductors and has its corporate offices in Waterloo, Ontario, Canada.

All trademarks are registered by their respective companies. DALSA reserves the right to make changes at any time without notice. © DALSA 2008. spyder2_S2_1x-xxx40

